


Crescent MicroDE-4

Simple Compact HDMI Quad Split

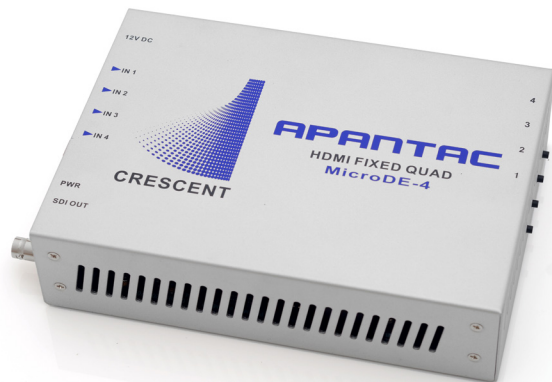

MicroDE-4

Key Features


- 4 HDMI 1.4 inputs, fixed quad split
- Low power consumption - 15W
- Decodes up to 4 channels embedded audio per HDMI input and display them as meters
- Supports 480P, 720P, 1080i and 1080P inputs
- Ethernet for configuration, dynamic labels & Tallies (TSL)
- Simultaneous HDMI and SDI outputs
- 2 GPI tallies per window
- 8 GPI contacts, can be configured for tally or ASCII protocol
- Borders can be turned on or off
- One 32 characters label per window
- Text and background colors have adjustable transparency
- Safe area markers
- Visual Alarm tags for audio and video presence
- HDMI and SDI outputs have embedded stereo audio pair for monitoring



CRESCENT

MicroDE-4

Rear view

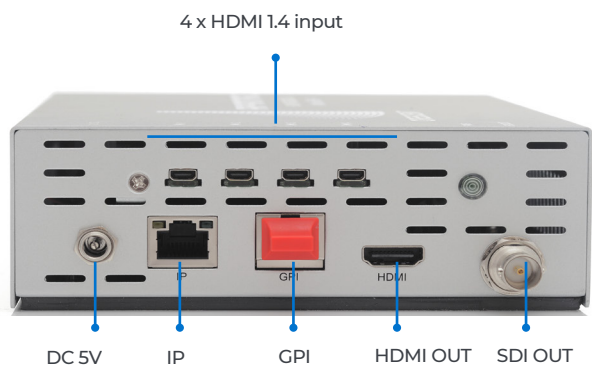

Standard Accessories

- DC 5V power supply
- RJ50 to DB9 for GPI
- Breakout terminal block

Options

- 1 RU rack mount

Specifications

Total Windows	4	Output	1 x HDMI, 1 x SDI with audio
Inputs	HDMI	HDMI	1080p@50/59.94/60Hz
Connector Type	Micro HDMI (Type D)	Connector Type	HDMI Type A
Maximum Resolution	Up to 1920x1080P@60Hz	SDI	Matching the HDMI output resolution up to 3G
Embedded Audio	Decode up to 4 channels per input	Connector Type	BNC
Connector Type	HDMI	On Screen Display	Borders, labels, tallies, audio meters, alarm tags, safe areas
GPI	8 for tally or AXP (ASCII commands)	IP	1000 base-T, TSL, AXP_Lite protocol
Connector Type	RJ-50 with terminal block	Power	15 W