

CRESCENT

Mi-8 12G UHD

Cost Effective 8x1 12G/3G/HD-SDI input Multiviewer with HDMI 2.0 (UHD) output



Key Features

- Low latency - single frame processing delay
- Low energy - only uses 55W of power
- Accepts 8 auto-detect 12G/3G/HD-SDI inputs
- Supports 8 2SI or 4 square division
- Windows can be sized and moved freely
- Decodes up to 16 embedded audio per input
- Total of 64 audio meters
- 1 x HDMI 2.0 (UHD) output
- 1 x 12G-SDI and 1 x 3G-SDI output
- Output resolution up to 3840x2160@60Hz
- Ethernet for configuration and external control
- Dynamic UMD/Label and Tallies (TSL)
- Standalone labels and 2 customizable logos
- 2 digital and 2 analog clocks can be synced with LTC or NTP
- 32 GPIs for tallies, count up/down triggers or preset recalls
- Borders can be turned on or off
- 2 sets of safe area markers
- Visual alarm tags for format, video/audio presence
- Audio monitoring outputs - stereo, AES, SDI or HDMI
- 1 RU with optional redundant power supply
- Optional redundant power supply
- 3 year limited warranty

Accessories

Standard

- Rack-mounts
- 4x RJ50 to DB9 cables for GPI
- 4x breakout terminal blocks
- RJ45 to DB9 cable for serial (RS-232)
- Analog audio breakout cable

Optional Hardware

- Redundant power supply


Optional Software License

- Third Party Router Interface
- OP47 license
- Closed Caption license
- ATC/VITC decode license

CRESCENT

Mi-8 12G UHD

Rear View

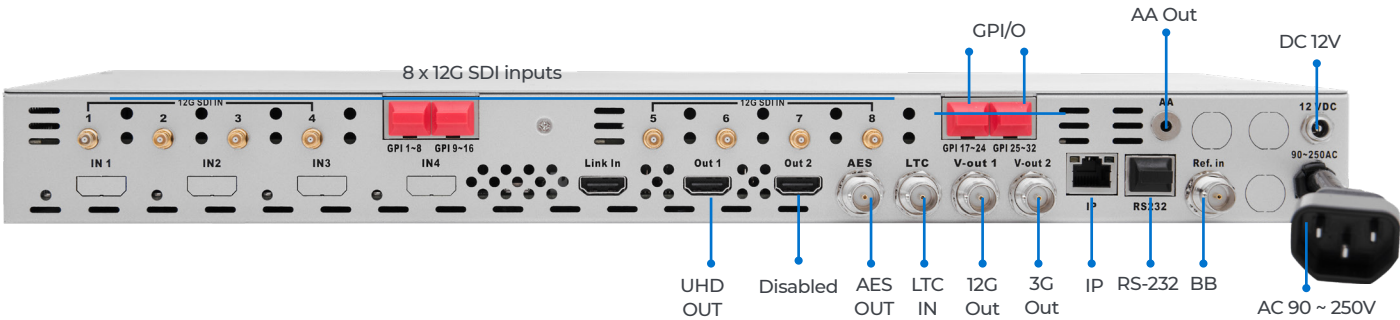

SUPPORTED INPUT FORMATS				
12G-SDI	6G-SDI	3G-SDI (Level A)	1.5G-SDI	1.5G-SDI
3840x2160 59.94	3840x2160 30Hz	1920x1080 59.94Hz	1920x1080 59.94i	1920x1080 23.98p / psf
3840x2160 50Hz	3840x2160 29.97Hz	1920x1080 50Hz	1920x1080 50i	1920x1080 24p/psf
3840x2160 60Hz	3840x2160 25Hz	1920x1080 60Hz	1920x1080 60i	1920x1080 25p/psf
	3840x2160 24Hz			1920x1080 29.97p/psf
	3840x2160 23.98Hz			1920x1080 30p/psf

Specifications

Video Inputs	Up to 8 12G/6G/3G/1.5G SDI	Outputs	1 x HDMI 2.0, 1 x 12G SDI, 1 x 3G SDI
Connectors	BNC IEC, 61169-8 Annex A	Output Resolu-tions	3840x 2160 and 1920x1080P@50/60Hz
Total Windows	4, 8	On Screen Dis-plays	Borders, labels (4 per window), fonts, tally LED, analog and digital clocks, logos, UMD, OMD, IMD
Serial Digital	SMPTE ST-2082	General Purpose IO	Borders, labels (4 per window), fonts, tally LED, analog and digital clocks, logos, UMD, OMD, IMD
Equalization	70 m at 11.88 Gbps, 120m at 2.97 Gbps, 140m at 1.485 Gbps	Serial Port	RS-232. Connector: RJ45, Baud Rate up to 115,200. Format: TSL, AXP
		Electrical	100 W, 90 ~ 250 V 50/60 Hz
EMI/RFI	Complies with FCC Part 15 Class A, CE, EU, EMC, C-tick	Size / weight	1RU. 446 x 452 x 44 mm (L x W x H)
Alarms	No audio, no video, video formats	Environment	Operating temperature: 0 ~ 45 C Operating humidity: 20 ~ 90% RH Storage temperature: -20 ~ 60 C