

HDR-UHD-32X32

32X32 ULTRA HD (4K/60HZ) SEAMLESS MATRIX



**MATRIX SOLUTION WITH 4K FULL UHD INPUTS AND OUTPUTS,
AN INTEGRATED CONVERTER AND SCALER**

FEATURES

- Supports UHD 4K/60Hz, 4K/30Hz and 1080p/60Hz on both inputs and outputs
- HDMI 2.0 input
- Seamless switching
- Control via IP, RS232 and the front panel
- Windows GUI allows unlimited customization
- Integrated scaler can convert any resolution to UHD
- Complete hardware solution
- Plug-and-play ready
- Unlimited Layouts

APPLICATIONS

- Corporate or Educational Presentations
- Airport Installations
- Digital Signage
- Dealer Rooms
- Control Rooms
- Shopping Centers
- Security
- Point-of-Sale Retail
- Entertainment Venues
- Corporate Lobbies
- Restaurants



Designed and Manufactured in the USA


OVERVIEW

The HDR-UHD-32X32 is a matrix switch with up to 32 full UHD inputs and 32 outputs, an integrated converter and scaler. Compact, plug-and-play, and excellent for mid-sized displays between 32 screens with resolutions up to 4K (3840x2160 @ 24 Hz/25 Hz/30 Hz/50 Hz/60 Hz) Full UHD.

The HDR-UHD-32X32 is simple to control, outfitted with easy front-panel buttons and optional RS232 control. The HDR-UHD-32X32 comes with SmartAVI's intuitive HDR-UHD Manager software absolutely free! HDR-UHD Manager software lets users manually create and adjust their ideal displays using simple click-and-drag operation: it's fun and great for users of any technical skill level! Users can choose from a number of great pre-configured screen modes as well, displaying content in various layouts with the press of a button. The HDR-UHD-32X32 also features TCP/IP web control for LAN-connected units, so users can control the contents of the display from the comfort of a PC workstation.


Its compact design and powerful processing power make the HDR-UHD-32X32 the perfect solution for any installation. Plug-and-play, the HDR-UHD-32X32 is immediately ready for use as soon as it is connected to an AV set-up: no additional drivers or installers required. Better still, its exceptional hardware makes for stunning displays in environments like retail spaces, educational facilities, conference rooms, command centers, etc.

Smart-**AVI**

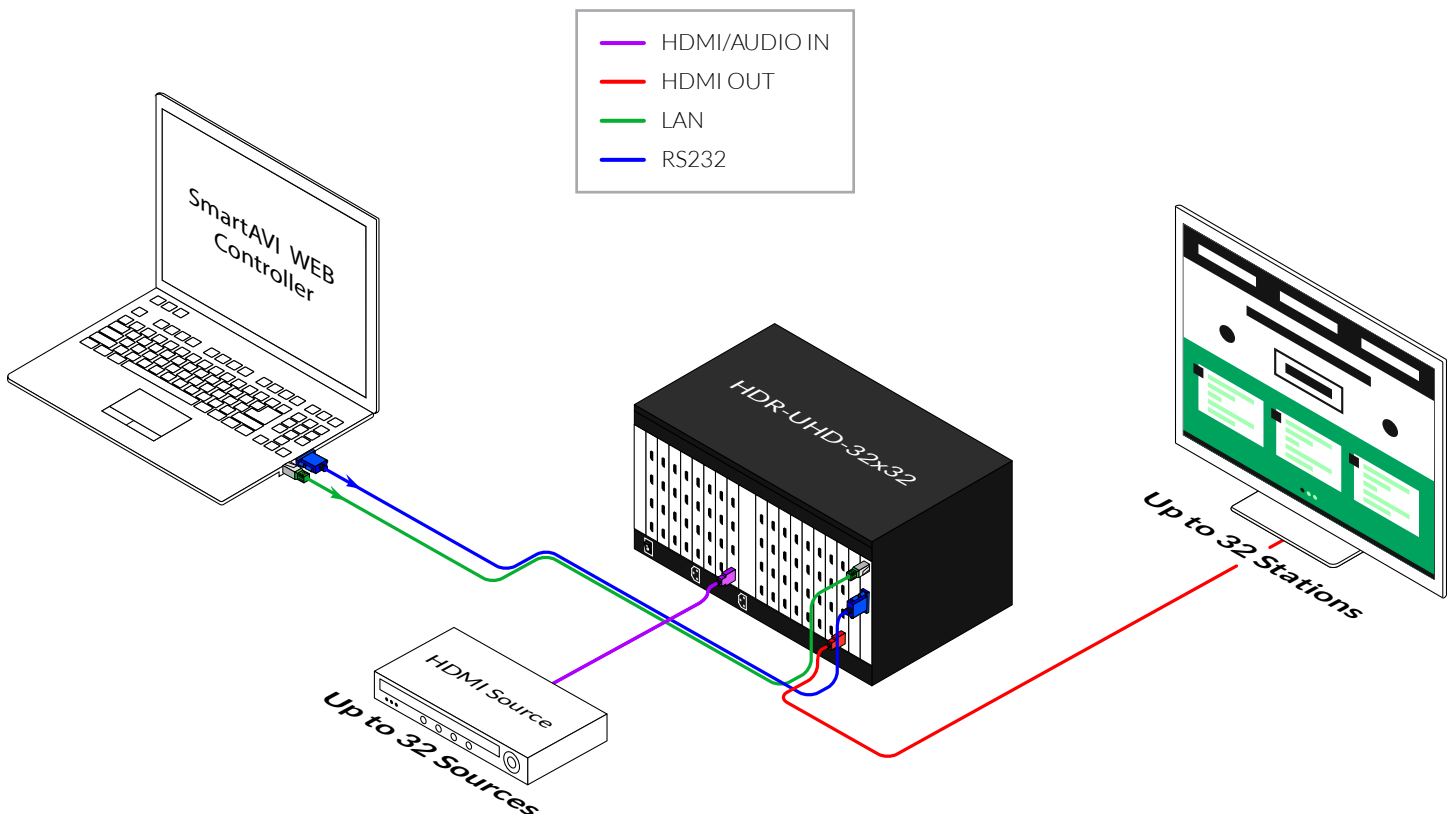

AVAILABLE CONFIGURATIONS

It is easy to create different configurations or modes that are simple to navigate through with the HDR-UHD-32x32. There are endless possibilities. Creating and switching between display modes is simple. Front panel buttons, on-screen-display, RS232, and TCP/IP can be used to switch between modes at will. The HDR-UHD-32x32 presents nearly unlimited configuration possibilities.

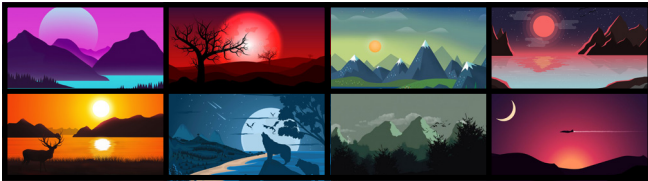


INDIVIDUAL MODE

Users can route individual input images to each display individually.

HDR-UHD MANAGER SOFTWARE

The HDR-UHD-32X32 also comes with SmartAVI's intuitive HDR-UHD Manager software, which allows users to create amazing video wall displays in minutes. Its click-and-drag operation and simple layout ensure managing video walls is easy and effective every time!

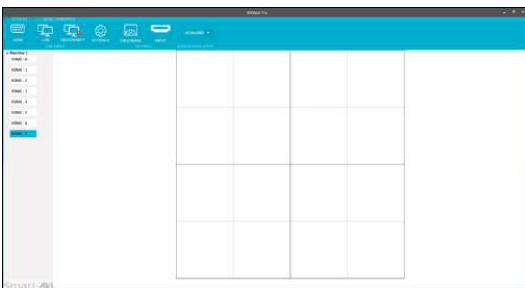


EASY TO USE

The HDR-UHD Manager software features a streamlined layout that keeps things simple and clear. Our intuitive menus and settings interface ensure set-ups always are easy and stress-free. Choose from settings like aspect-ratio, rows, columns, video sources, and more! Adjust resolutions, scaling, and active monitors on the fly. Not happy with your current configuration? Just clear the workspace and start fresh: it's that simple!

FULLY CUSTOMIZABLE

Take your pick of any of our versatile display modes. Select any screen and input the source you would prefer. Even multiple video sources can share a single screen with INDIVIDUAL and QUAD display modes. The possibilities are as endless as your creative potential!

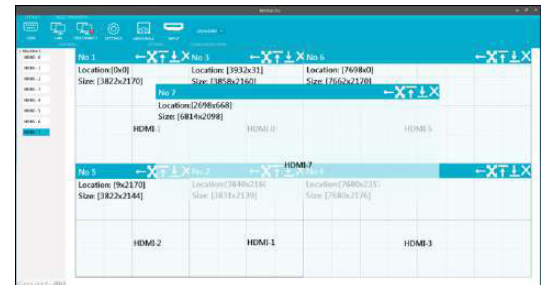

FRONT AND BACK



HDR-UHD-32x32 Front panel



HDR-UHD-32x32 Back panel

TECHNICAL SPECIFICATIONS

VIDEO	
Video Amplifier Bandwidth	18 Gbps
Input Video Signal	Video (TMDS) 0.4~1.0Vpp
Input DDC Signal	5 volts
Compliances	HDMI 2.0, HDCP 2.2
Input Resolutions	3840 x 2160 @ 24 Hz / 25 Hz / 30 Hz / 50 Hz / 60 Hz
Output Resolutions	3840 x 2160 @ 24 Hz / 25 Hz / 30 Hz / 50 Hz / 60 Hz; 1080p @ 60 Hz
Video Type	HDMI2.0
Input Interface	(32) HDMI 19-pin (female)
Output Interface	(32) HDMI 19-pin (female)

AUDIO	
Format	Stereo
Input Interface	(32) HDMI2.0 (Female)
Output Interface	(32) 3.5mm (Female)

PART NO.	DESCRIPTION
HDR-UHD-32x32-S	32x32 4K/60Hz Video Matrix Switch. Includes: [HDR-UHD-32x32 and CCPWR06]

CONTROL	
Front Panel	Tacticle Switches
RS-232	DB9 connector, Baud Rate 115200
TCP/IP	RJ45, UDP telnet

OTHER	
Working Temperature	0°C~+40°C
Storage Humidity	20%~90%
Weight	24.45 lbs
Dimensions	17" W x 7 1/8" H x 15" D
Power Supply	50/60Hz, 110-240 VAC
Consumption	100W

www.smartavi.com

Tel: (888) 994-7427 • (702) 800-0005
2455 W Cheyenne Ave, Suite 112
North Las Vegas, NV 89032

Smart-AVI
SMART AUDIO VIDEO INNOVATION